



FLAME

Modular GAS deck oven.
The combined arrangement of
burners and Activestone technology

 **PIZZAGROUP**

High productivity at low consumption.

This professional gas oven specifically designed for pizzerias is extremely popular and suited to a wide range of locations. User-friendliness, guaranteed energy savings and uncompromising performance make it the oven of choice for many a chef and pizza-makers. **A special burner layout and Activestone technology combine to generate heat quickly, ensuring uniform cooking throughout the chamber, saving both time and energy.**


The Flame gas oven is certified and tested annually.

GENERAL FEATURES



Burning Technology

Specially shaped steel deflectors convey heat to the perforated roof of the chamber and, by radiation, onto the pizza. This special burner arrangement generates heat according to a **convective motion**, typical of wood-fired baking. With **Flame** it is possible to **replicate the dynamics and baking of a wood-fired oven, without charcoal** and without the inconvenience of wood-fired baking such as cleaning and food contamination.

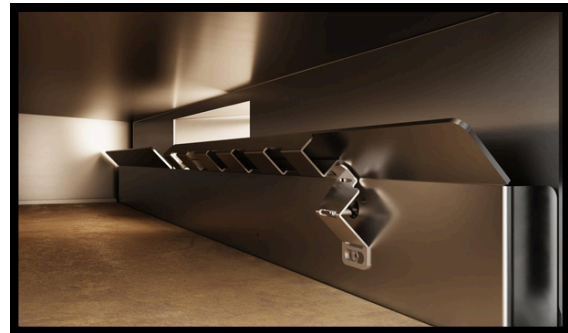

840 °F (450 °C) max temperature.

Perfect for any dough, also high hydrations products requiring a very short cook time, like Napoli-style pizza.



Safety

The ignition, no pilot light.



Cooking chamber

Chamber height 5.9".



Refractory Stone

More crispy and long lasting results. Bake any product directly on the stone without the need to use trays or pans.

Made completely in stainless steel for long lasting life working 24/7

Warranty: 1 year parts and labour

Mandatory gas regulator each ovens 3/4"

Safety thermostat

Easy to clean, user and Service friendly

Counter balanced doors

Double glass door

Armored electric elements



CONFORMS TO
NSF/ANSI STD 4



CONFORMS TO
ANSI STD Z83.11
CERTIFIED TO
CSA STD 1.8

Specially shaped steel deflectors convey the heat towards the perforated chamber roof and, by irradiation, onto the pizza. This recreates the dynamics of a wood-fired oven but without using charcoal and in complete safety.

TECHNICAL DATA - OVENS

	FLAME 4 ETL	FLAME 6 ETL	FLAME 6L ETL	FLAME 9 ETL
EXTERNAL DIMENSIONS LxWxH	113x107x63 cm 44.5"x42"x25"	113x145x63 cm 44.5"x57.5"x25"	147x91x71 cm 58"x36"x28"	147x140x71 cm 58"x55"x28"
INTERNAL DIMENSIONS LxWxH	70x70x15 cm 27.6"x27.6"x5.9"	70x105x15 cm 27.6"x41.3"x5.9"	105x70x15 cm 41.3"x27.6"x5.9"	105x105x15 cm 41.3"x41.3"x5.9"
WEIGHT KG LB	132 291	164 361	164 361	196 432

TECHNICAL DATA - STANDS

DIMENSIONS LxWxH	113x89x95 cm 44"x35"x37"	113x124x95 cm 44"x49"x37"	148x89x95 cm 58"x35"x37"	148x124x95 cm 58"x49"x37"
WEIGHT KG LB	34 75	40 88	42 93	42 93

GAS SPECS	FLAME 4 ETL	FLAME 6 ETL	FLAME 6L ETL	FLAME 9 ETL
Gas Type	Natural or Propane	Natural or Propane	Natural or Propane	Natural or Propane
Gas pipe inlet x deck	3/4	3/4	3/4	3/4
Mandatory Gas Regulator at oven	Regulator 20 or 30 mBar	Regulator 20 or 30 mBar	Regulator 20 or 30 mBar	Regulator 20 or 30 mBar
Gas version: power (BTU/h)	45000 Btu/hr	62000 Btu/hr	65100 Btu/hr	90000 Btu/hr


NOTE

Safety chains must connect the oven to the wall to prevent it from moving. Anchoring must be done by the customer.
The length of the safety chain must prevent the flexible hoses from straightening. Safety chains are not included with the oven.
The gas hose does not come with the oven. The customer must purchase one and have it available on site for the installation day.


Minimum 4 Inches of clearance is required on all sides of the oven. At any time and without any notice the Manufacturer reserves the right of implementing all useful and necessary modifications for products improvements.

SIZE AND CONFIGURATION


FLAME 4 ETL

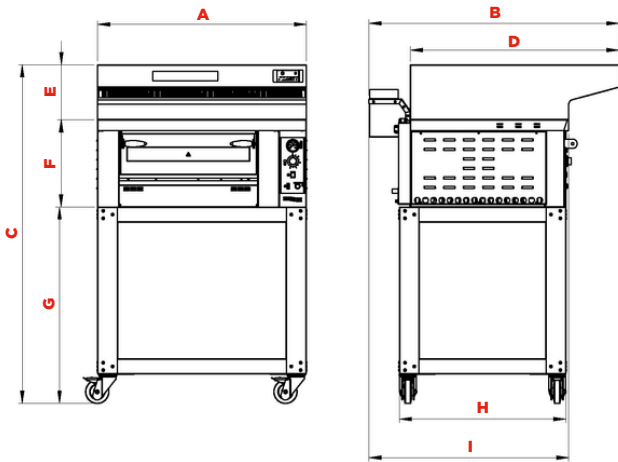


FLAME 6 ETL

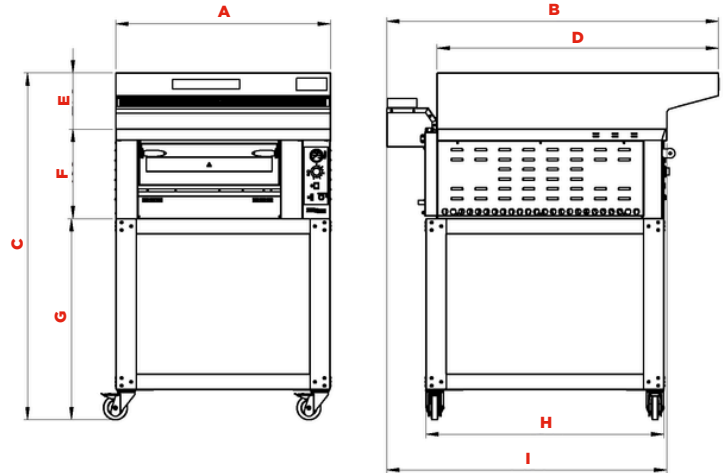

FLAME 6L ETL

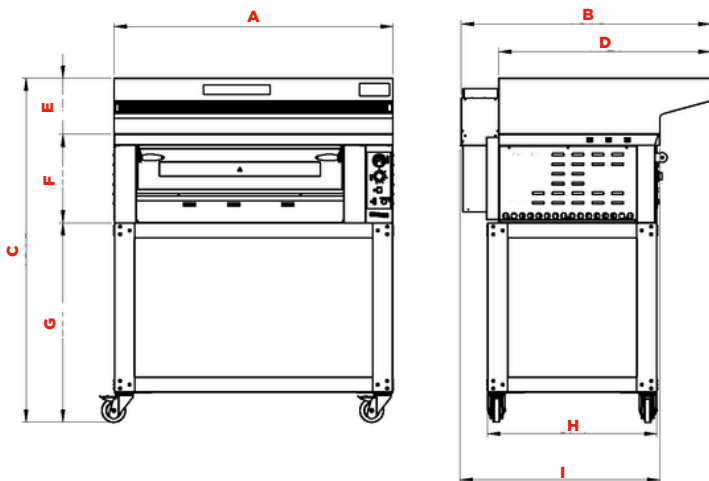

FLAME 9 ETL

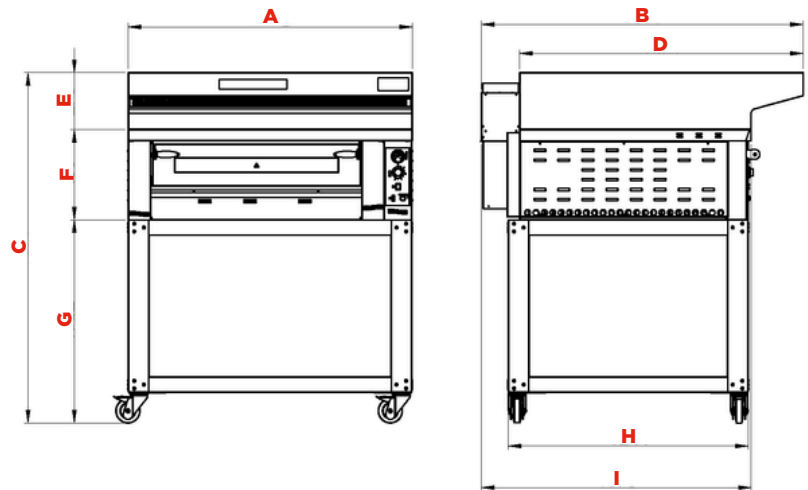

EXTERNAL DIMENSIONS

Model	A	B	C	D	E	F	G	H	I
FLAME 4 ETL	44.2" 112 cm	52.9" 134 cm	71.4" 181 cm	44.1" 112 cm	11.6" 29 cm	18.4" 47 cm	41.4" 105 cm	35.2" 89 cm	42.2" 107 cm
FLAME 6 ETL	44.2" 112 cm	68.2" 173 cm	71.4" 181 cm	57.9" 147 cm	11.6" 29 cm	18.4" 47 cm	41.4" 105 cm	49" 124 cm	57.6" 146 cm
FLAME 6L ETL	57.9" 147 cm	51.9" 132 cm	71.4" 181 cm	44.1" 112 cm	11.6" 29 cm	18.4" 47 cm	41.4" 105 cm	35.2" 89 cm	41.5" 105 cm
FLAME 9 ETL	57.9" 147 cm	65.7" 167 cm	71.4" 181 cm	57.9" 147 cm	11.6" 29 cm	18.4" 47 cm	41.4" 105 cm	49" 124 cm	55" 140 cm

OTHER INFORMATION

INSTALLATION SPECIFICATIONS

A pizza/baking specialist will set the oven for your production needs (on request).

All oven parts can fit through a standard 36"x80" door.

Installation phases require 4 - 6 hours / Ventilation hook-ups are at the customer's responsibility and expense / Installation must be carried out by the proper trade professionals and in accordance to local regulations / As for ventilation requirements, a specialist is required / A certified plumber is required on site during installation phases.

ELECTRICAL REQUIREMENTS

	FLAME 4 ETL	FLAME 6 ETL	FLAME 6L ETL	FLAME 9 ETL
Voltage	120 V	120 V	120 V	120 V
Phase	1 PH	1 PH	1 PH	1 PH
Kw	0.1	0.1	0.1	0.1
Frequency	60 Hz	60 Hz	60 Hz	60 Hz
Gas Supply	Natural Gas 20 mBar	Natural Gas 20 mBar	Natural Gas 20 mBar	Natural Gas 20 mBar
Gas Supply	LPG Gas 30 mBar	LPG Gas 30 mBar	LPG Gas 30 mBar	LPG Gas 30 mBar

SHIPPING INFORMATION	Packaging LxWxH	Packaging Weight
Flame 4 ETL	130x120x72 cm 51"x47.5"x28.5"	195 kg 430 lb
Flame 6 ETL	160x160x72 cm 63"x63"x28.5"	250 kg 551 lb
Flame 6L ETL	160x120x72 cm 63"x47.5"x28.5"	245 kg 540 lb
Flame 9 ETL	160x160x72 cm 63"x63"x28.5"	280 kg 617 lb
Stand for Flame 4 ETL	112x93x12.5 cm 44"x37"x5"	54.5 kg 120 lb
Stand for Flame 6 ETL	112x126x15 cm 44"x50"x6"	62 kg 137 lb
Stand for Flame 6L ETL	148x91x15 cm 58.5"x36"x6"	63 kg 139 lb
Stand for Flame 9 ETL	143x122x15 cm 56.5"x48"x6"	75 kg 165 lb

SHIPPING INFORMATION	Packaging LxWxH	Packaging Weight
Hood for Flame 4 ETL	121x121x43 cm 47.5"x47.5"x17"	56 kg 123.5 lb
Hood for Flame 6 ETL	156x121x43 cm 61.5"x47.5"x17"	74 kg 163 lb
Hood for Flame 6L ETL	156x121x43 cm 61.5"x47.5"x17"	76 kg 168 lb
Hood for Flame 9 ETL	156x156x43 cm 61.5"x61.5"x17"	90 kg 198.5 lb